

TENCO®

SÉRIE
SERIAL #

54460

MODÈLE
MODEL

TCP-12-S-42-FKC-HA2

MODÈLE
MODEL #

211 23 0151

FINAL 211 23 0151


112280712

TENCO INC.

ST-VALÉRIEN-DE-MILTON, QUÉBEC, CANADA J0H 2B0
FABRIQUÉ AU CANADA / MADE IN CANADA

EpoBasic®
EpoMaster®

433945

12/24 v [+] = 


eko



CE

AF. NO



Pg16

CHVW 06 L16

CHOW 06 L16



Pg16

CE

v201127



441167
S12 std. fordelerbok Nord Amel
cia

Model: S12
Type: S12
Voltage: 10 - 12 VDC
Power: 10 A
Material: Steel



epoke®

SIRIUS COMBI AST®

epoke®

epoke®

SIRIUS COMBI AST®

Sirius AST®



epoke®

SIRIUS COMBI AST®

Sirius AST®







epoke[®]
SIRIUS COMBI AST[®]

epoke[®]

SIRIUS AST[®]

FORT
McMURRAY
AIRPORT

1

CAUTION
Read the manual
before operating
the machine.
- Return
- Pressure



epoke®

SIRIUS COMBI AST®

epoke®

CAUTION
Bitte die Schutzmaßnahmen
für Arbeiten an beweglichen
Teilen beachten!
Epoke® 11-32
100% 100%


SIRIUS AST

COVERLISEN



epo

CAUTION
Refer to local regulations
for spreader tie-down
requirements

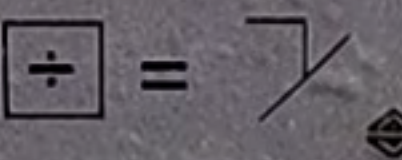EpoMaster X1-X2
12/24 v 



11X


K1a

K1a

Hydraulic Connections



Spreader		Vehicle	
Type	SH4902	Max. oil flow, continuously	l/mk 50
Ident. no.	49230600	Max. oil flow, intermittently	l/mk 60
Year	2022	Min. oil flow	l/mk 45
Volume Dry matter	m ³ 6.0	Oil pressure	min. bar 170
Volume Liquid	l 3180	Epoke® AIS Vejenvej 50 DK-6900 Vejen Denmark	
Net weight	kg 2470	CE UK CA epoke®	
Off-loading total weight	kg 17000	UID No. 777024	

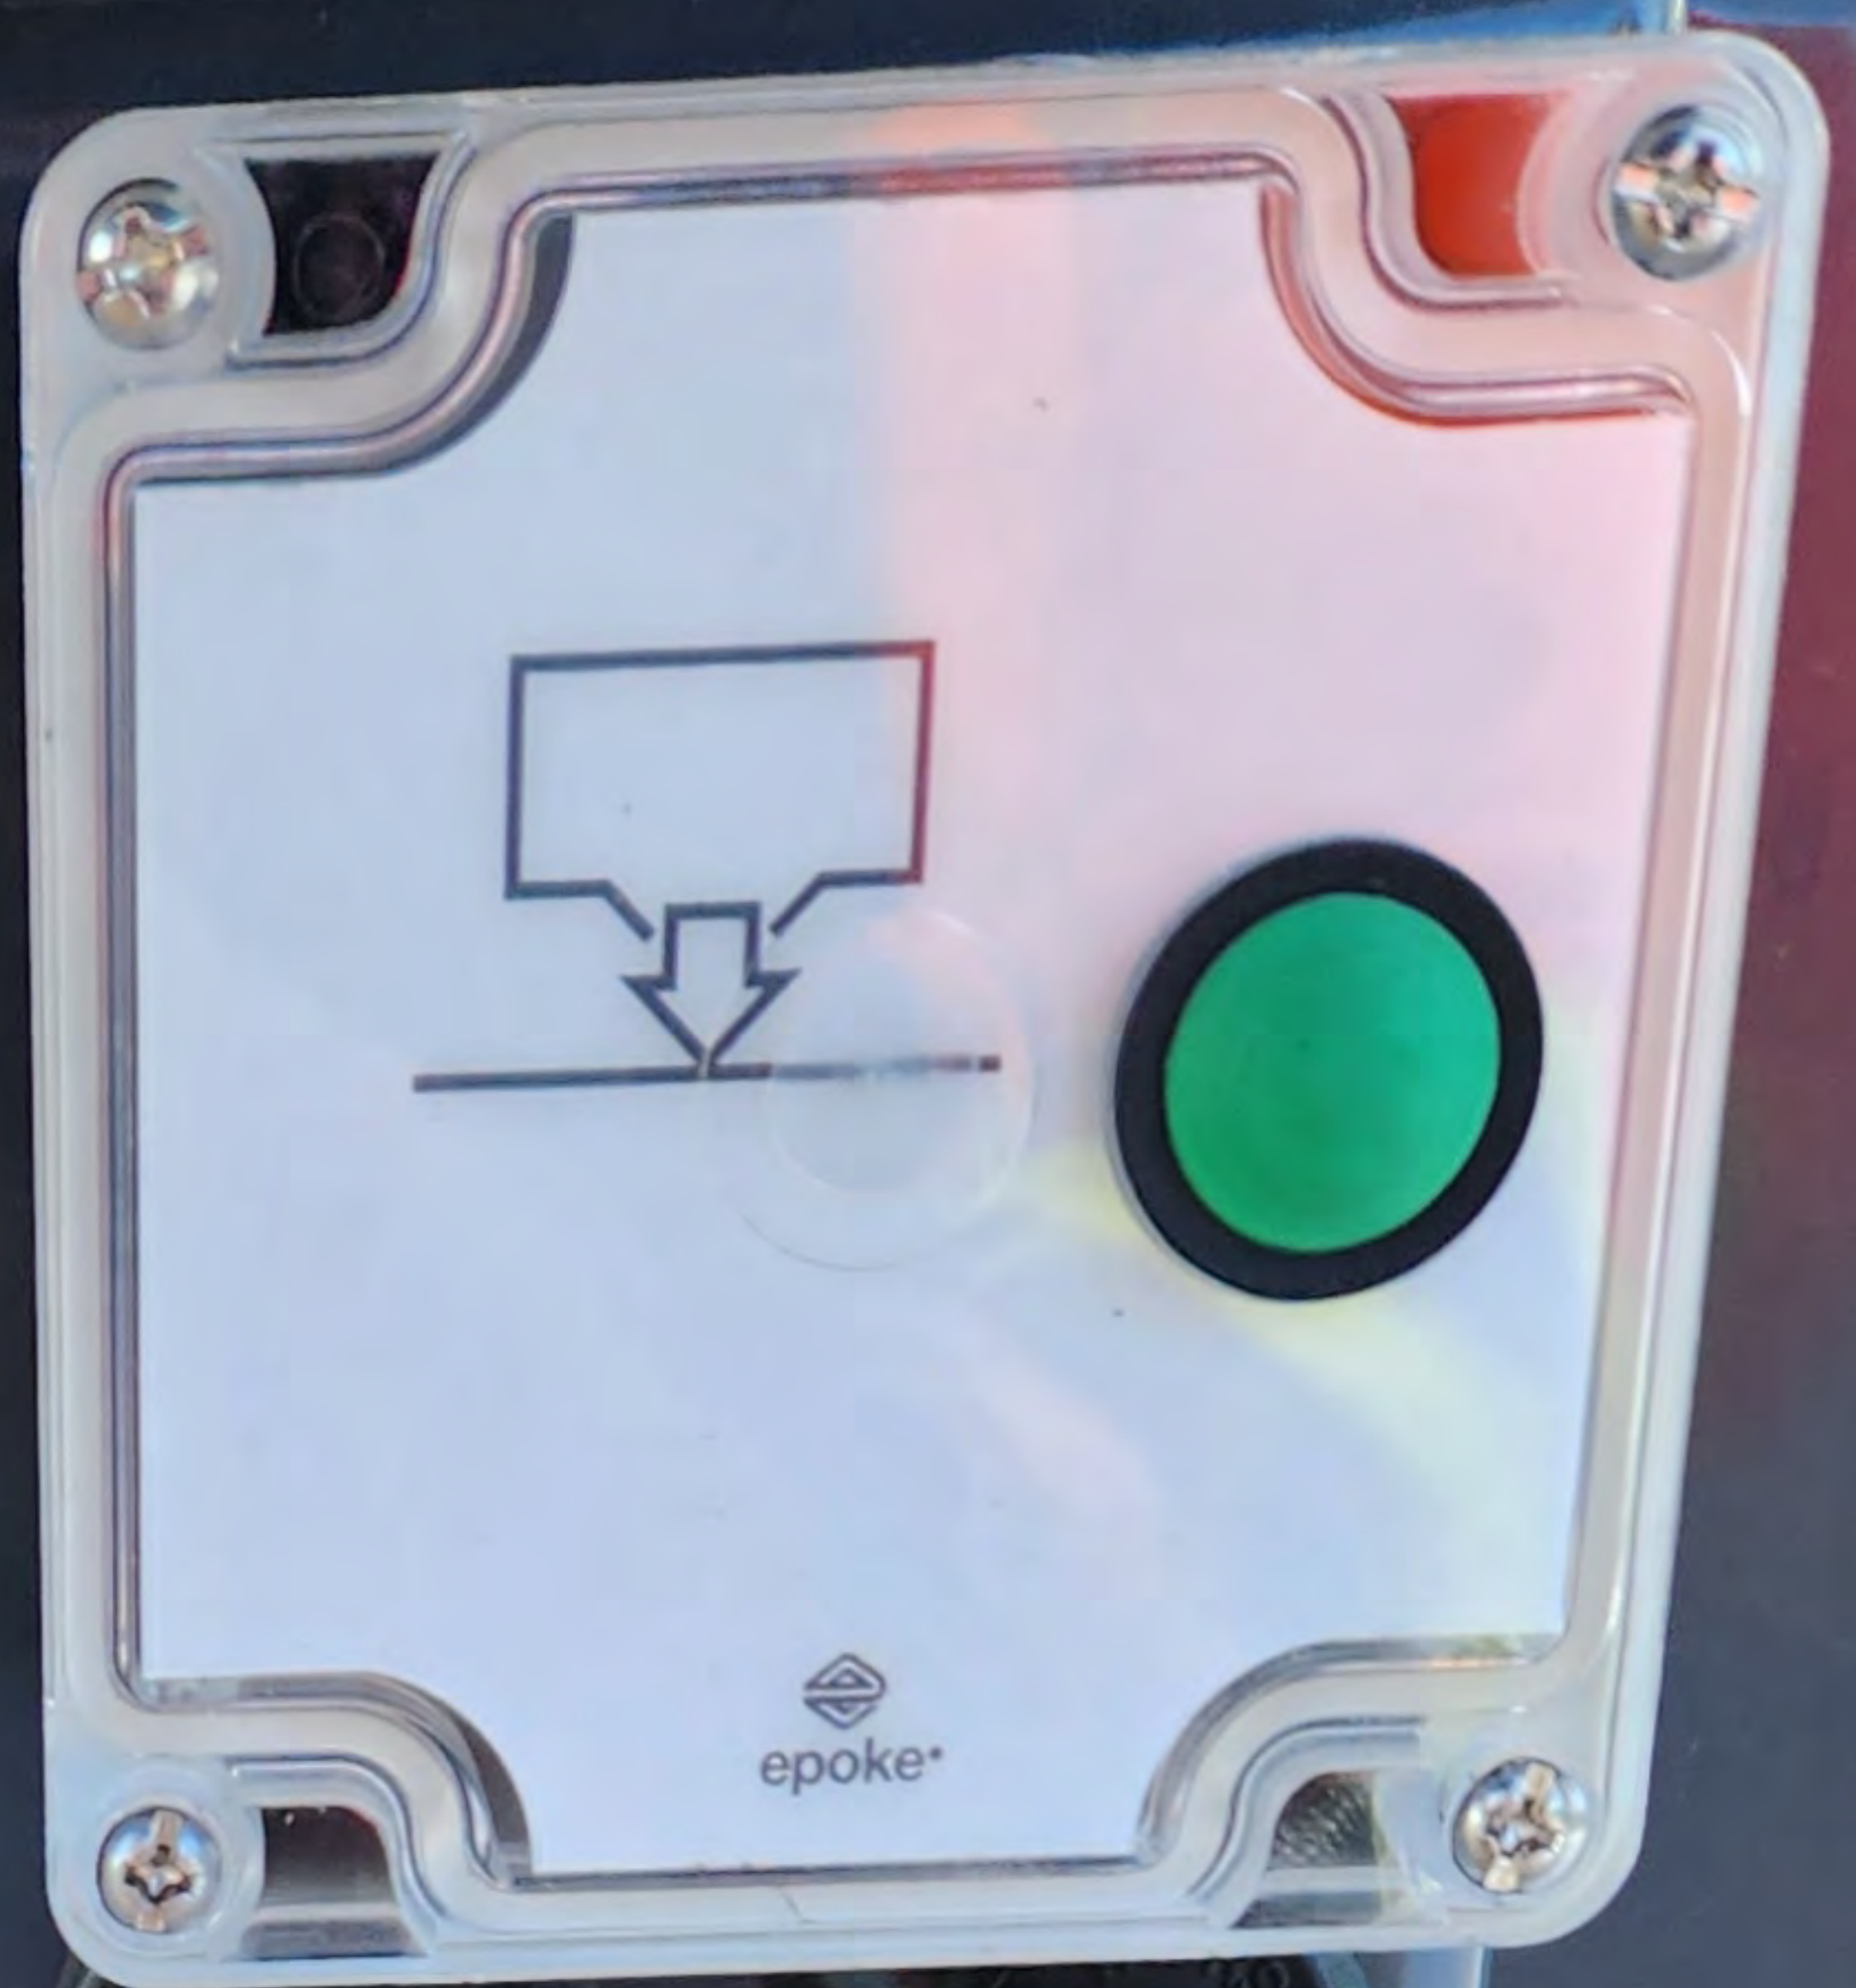

epoke®

MENNEKES®
Made in Germany

Direction for coupling/ uncoupling hydraulics

Disconnect hydraulics

1. Always turn off hydraulic flow to the spreader before disconnecting
2. Always disconnect pressure line coupler first

Reconnect hydraulics

1. Always reconnect return line first

438407

Vehicle Hydraulics

← Return

Min. flow	45 LPM 12 GPM
Max. flow continuously	50 LPM 13 GPM
Max. flow intermittent	60 LPM 16 GPM
Min. pressure	170 bar 2500 psi
Max. back pressure	15 bar 215 psi




←- Pressure

CAUTION

Refer to local regulations
for spreader tie-down
requirements



439384

Spreader		Vehicle	
Type	SH4902	Max. oil flow, continuously	l/min 50
Ident. no.	49230600	Max. oil flow, intermittently	l/min 60
Year	2022	Min. oil flow	l/min 45
Volume Dry matter	m ³ 6,0	Oil pressure	min.bar 170
Volume Liquid	l. 3180	Epoke® A/S Vejenvej 50 DK-6600 Vejen Denmark	
Net weight	kg 2470	  	
Off-loading total weight	kg 17000		
UID No.	777024		